


EX5500

STANDARD PLATFORM OFFERING

GET & BUCKETS

29m³ Bucket

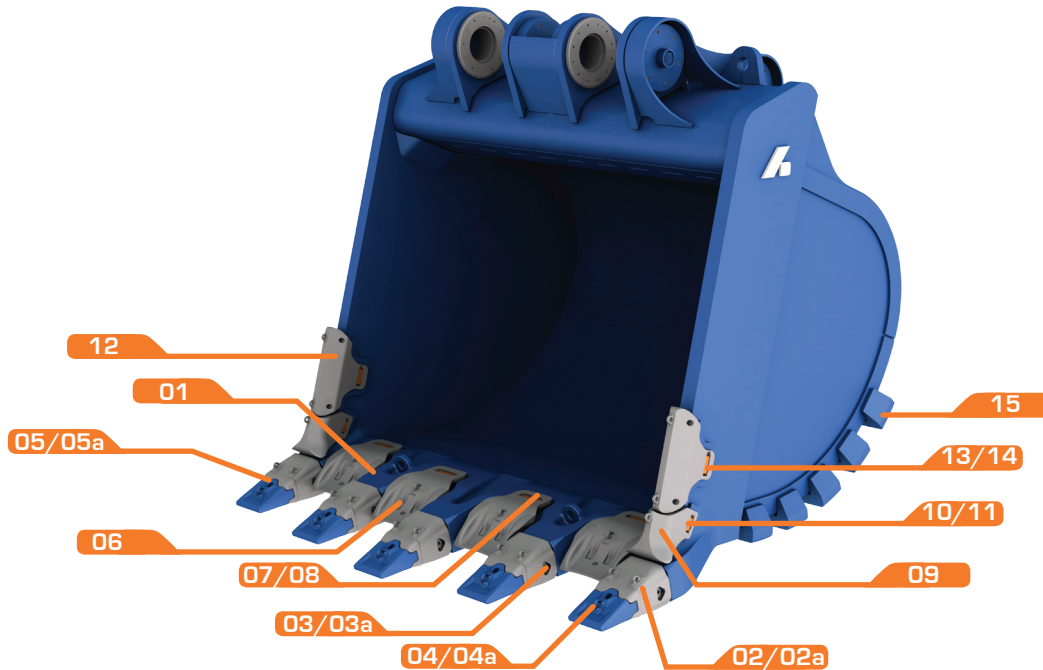

Item	Part No.	Description	Qty.	Mass	
				kg	lb
	BMH5500CL29.0-1	29m ³ Avalanche EX5500 Bucket	1	29,922*	65,967*
01	PCL30-3759	Penetrator Cast Lip	1	6375	16588
02	PA30BC12V	Penetrator Adapter	5	188	423
03	PLP30H	Penetrator Adapter Locking Pin	5	9	19
04	PP12VGL	Penetrator Point	5	62	139
05	PLP12V	Penetrator Point Locking Pin	5	2	3
02A**	PA30P12H	Penetrator ^{max} Adapter	5	190	419
03A**	PLP30HA-B	Penetrator ^{max} Adapter Locking Pin	5	10	22
04A**	PP12A	Penetrator ^{max} Point	5	67	148
05A**	PLP12HB	Penetrator ^{max} Point Locking Pin	5	6	13
06	DELCB30-1	Defender Shroud	4	300	661
07	DCB-1	Defender Boss	4	4	9
08	DCP	Defender Locking Pin	4	5	11
09	DEWA135-1	Defender Lower Wing Shroud	2	29	64
10	DAB	Defender A Series Boss	4	1	2
11	DAP	Defender A Series Locking Pin	4	1	2
12	DEWB120X760-1	Defender Upper Wing Shroud	2	168	370
13	DBB	Defender B Series Boss	4	2	4
14	DBPA	Defender B Series Locking Pin	4	3	6
15	BK6697-7	Heel Block	10	82	181

* Mass is inclusive of GET

** Penetrator^{max} is Bradken's Hammerless offering for cast lips and not shown in the above image



EX5500

PRODUCT OVERVIEW

Ground Engaging Tools (GET) & Buckets

Bradken produces a series of comprehensive ground engaging tools (GET), associated wear parts, buckets and dragline rigging components to fit front-end loaders, hydraulic excavators and dragline machines. With a number of fabrication and maintenance workshops in key mining regions, we are well equipped to provide comprehensive aftermarket support.



Bradken **Avalanche™** Excavator buckets are designed to meet customers' production requirements and are engineered to suit OEM connections without the need for modification. Buckets for the Hitachi® EX5500 are sized on material density and/or target truck fleet with customisation at the forefront ensuring it meets your production and maintenance requirements.




The **Penetrator^{max}** system is designed to fit onto Bradken's **Penetrator** cast lip nose or an OEM nose, utilising a Bradken designed and manufactured adapter, point and hammer free locking pin system.



Bradken's **Penetrator** system is designed to fit onto Bradken's **Penetrator** cast lip nose, with a large range of points available that are attached to the adapter using a vertical hammered locking pin.



The **Defender™** range is designed to meet the world's toughest digging conditions. The shroud system will fit a wide array of mining excavator, face shovel, front end loader and construction machines using plate and cast lips.



Bradken's hammer free **Guardian™** System is designed to protect your machine fleet from excess wear. A wide range of wear runners offers flexibility and choice for your wear protection requirements. Runners are ready to fit on delivery utilising the hammerless removal tool.

Fixed Plant

Bradken aims to supply technically advanced wear solutions to the global market. Our Fixed Plant specialists are focused on developing products and services to meet customer aspirations. Our products include chromium carbide overlay, white iron block brazed to mild steel, ceramic/polyurethane, ceramic/rubber, nickel chromium white iron, quench and tempered steel, ceramic filled epoxy wear compounds and an ever increasing range.

Undercarriage Components

Bradken offers a full range of undercarriage componentry that is sold to original equipment manufacturers and mining operations globally. Our products include crawler shoes, sprockets, idlers and rollers for mining class electric shovels and hydraulic excavators.

Registered Trademarks: All company names, logos, product names and identifying marks used throughout this publication are the property of their respective trademark owners. They are used for descriptive purposes only and are protected by the relevant laws of the countries in which the trademarks are registered

